


















































Control								
Main Device Button 	Button	Press	Step	Indicator	LED Level	Sound	LED	Description
	POWER	One Press	On		On  Hight  Low  Off 	BB	Light On	
			Off		On  Hight  Low  Off 	B 1Sec.	Light Off	
	TIMER #1	One Press	High		On  Hight  Low  Off 	B	16 hrs On / Daily	Timmer setting just for light control.
			Low		On  Hight  Low  Off 	BB	9 hrs On / Daily	
	MODE	One Press	L (Leafy)		Dimmer Level L0  default L1  L2  L3  L4 	B	High-L4	Long press: Dimmer for 5 Levels cycling
			G (Garden)			BB	Low-L2	
			S (Succulent)			BBB	High-L4	
	COLOR	One Press	White		Hight  On  On  On  On  On 	B	-	L0 (B 1 sec) turn off L1 (B) Level 1 L2 (BB) Level 2 L3 (BBB) Level 3 L4 (BBBB) Level 4 and top Level
			Red		Low  On  Low  Low  Low  Low 	BB		
			UV #2		Off  Off  Off  Off  Off 	BBB		

#### Remark

- #1:
- Set up the Wake-up(automatically turns on everyday) and Sleeping(automatically turns off everyday) modes through lighting time setting  
A : Wake-up time setting: When light is on, press and hold for 5 seconds until it beeps  
B : Sleeping time setting: When light is off, press and hold for 5 seconds until it beeps
  - One short + One Long pressing the Power button resets the product to default settings
- #2: UV : On / Off.

#### Mode

G Mode:Red:White+UV=1:1 great for microgreen,Herb,microgreen,Herb,Moss Ferns growing  
S Mode: Red:White+UV=1:5 strong Blue white and UV is great for Succulents,Aquarium  
L Mode:Red:White=5:1 Strong Red,good for flowering,and leafy

### Planting Environment Notification

This product is designed for indoor gardening. Without built-in temperature control, our product works best within a temperature range of 18°C~30°C, specifically, 25°C. Except for special plants that naturally grow in higher or lower temperatures, please adjust the air circulating fans once the indoor temperature exceeds the range to sustain the plants' growth.

Feel free to visit the OPCOM website for more details!.



www.opcomfarm.com

### Indoor Garden Families

Auto Grow Light Tree



O2 Garden




Sky Garden Light



Microgreens Dome



Microgreens Dome

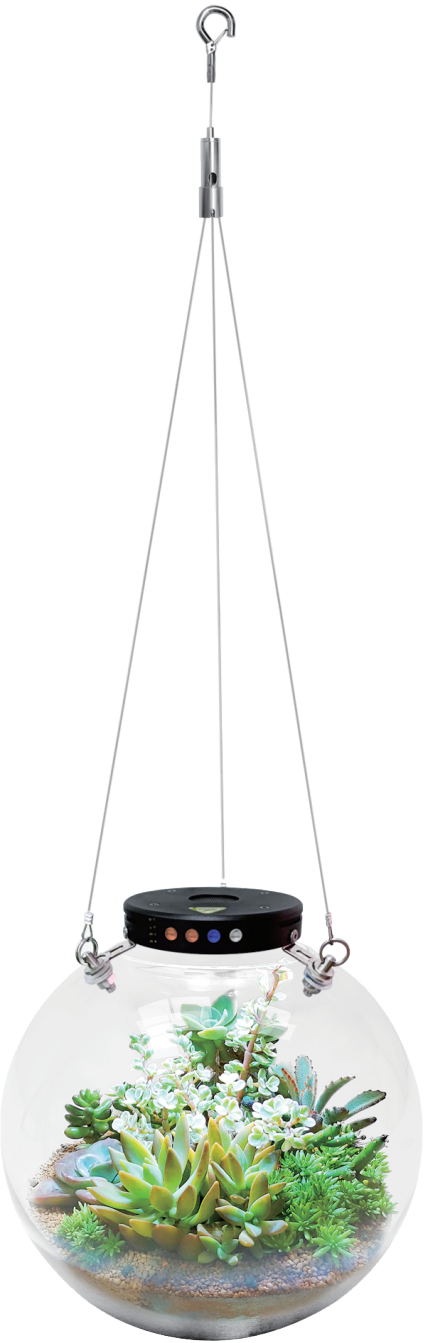

It's Time  
To Create Your Own  
Refreshing MicroGreen Landscape



# Sky Garden Light

## Quick Manual Guide


**OPCOM**  
Sky Garden Light  
Model : OFG008G

Thank you for your interest having Sky Garden Light. Hope you will like it very much.


The Sky Garden Light has the conditions for precision planting,including light,air,water,etc. From the succulent plants to the mosses of wetland and aquatic ecology,all that could get sufficient growth conditions in the intelligent mode without the special care. Its automatic mode provides the function of photometric sensing,which is quite suitable for creative placement or hanging in the environment of restaurant, balcony and indoor garden, and no need to worry about the lack of light at all.

The Sky Garden Light produce fresh air and positive energy every day, as well as the living environment that changes and projects light and shadow with the growth of plants. It provides the automatic On / Off mode. In the early morning, it can be awakened by the Sky Garden Light gradually as the phototherapy and to start the beautiful day; and at night, it can also help to fall asleep surrounded by the green andscaping. When several Sky Garden Lights are hung alternately up and down,the indoor environment soon becomes a 3D ecological garden immediately, with High Color Accuracy up to Ra90 grow light to display the true color of the garden and flood light.

Now,let's begin the wonderful planting journey....

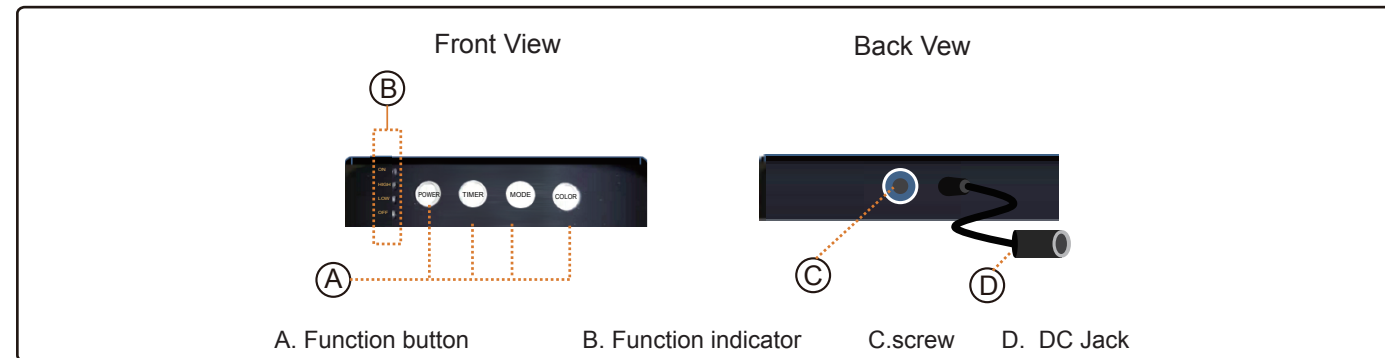

### Standard Accessories

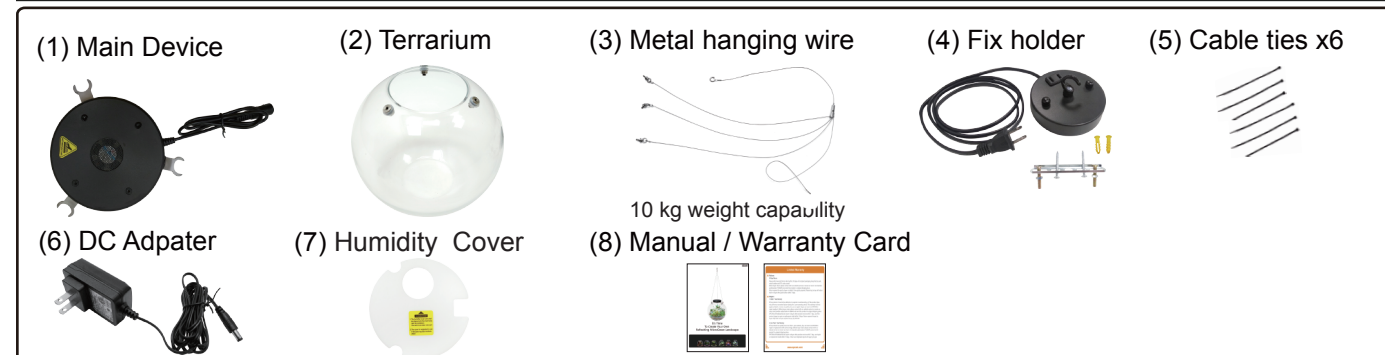

### Aquarium set (Optional)

### Microlandscape tool set(Optional)



**Hanging set setup:**Hanging set can handle weight up to 10kg and Win the 3D Sky Garden Art design around the room.



**Step 1**  
Fasten the fixing piece to the ceiling with screws.




**Step 2**  
Place the base on the fixing piece.



**Step 3**  
Use screws to lock the base to the fixing piece.




**Step 4**  
Plug the DC adapter into the socket of fix holder.




**Step 5**  
Hang the Sky Garden Light with the hanging cable firmly on the hanging assembly.



**Step 6**  
Adjust the lanyard to the proper length. Tie the excess wires of DC adapter.

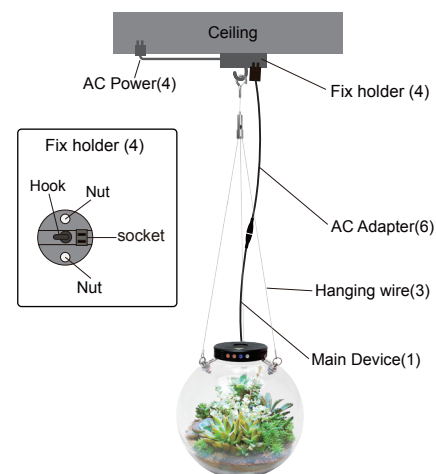

### Installation




**Step 1**  
Lock the ③ three screws on the metal hanging wire to the three screw holes in the ② terrarium.




**Step 2**  
Cover the ② terrarium with the ① three U-shaped iron pieces of the main device corresponding to the three screws of the ② terrarium.




**Step 3**  
Install the ④ fix holder.




**Step 4**  
Plug the ⑥ DC adapter into the socket of ④ fix holder.



**Step 5**  
Please pull down the metal wire in the hole to adjust the metal wire to be shorter. Please press down the round tube and pull up the wire above the round tube to adjust longer.



**Step 6**  
Hang the ③ buckle of the metal hanging wire on the hook of the ④ fix holder.




**Step 7**  
Connect the power cord of the ① main device to the ⑥ power cord of the Adapter.



**Step 8**  
Use ⑤ cable ties to tie the ⑥ excess wires of DC adapter.

### Planting

#### L mode



Herb

#### G mode




Moss+Ferns


#### S mode



Succulent



Aquarium

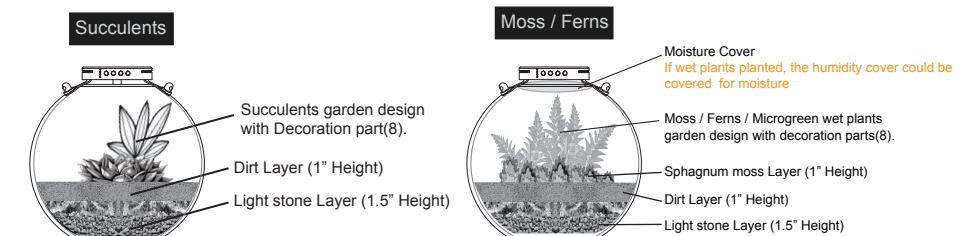


#### Aquarium

**Step 1:**  
Pick up the device to open the terrarium port and set up the aquarium planting.

**Step 2:**  
Plug Bubble tube(2) into water filter(3) and put into water bottom.

**Step 3:**  
Plug Bubble Tube(2) another end to Air Pump(1); and screw device to glass terrarium.

**Step 4:**  
Plug Power Code DC jack connector to Air Pump(1), Press Air Pump(1) top button to switch ON/OFF pump.

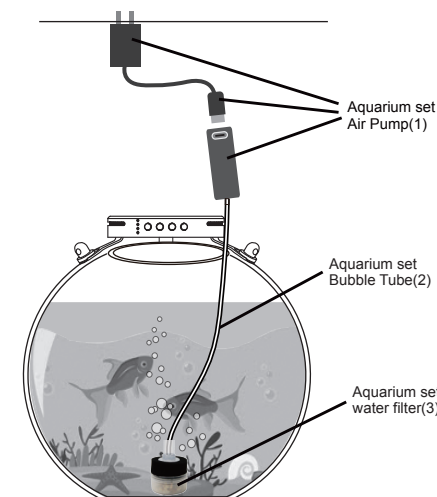

Welcome to check our planting videos from [www.opcomfarm.com](http://www.opcomfarm.com)



[www.opcomfarm.com](http://www.opcomfarm.com)